




CLIC DESK


Clic is a desk programme which allows you to configure individual and group work stations, the latter set out in rows or facing each other. The desk consists of a self-supporting metal frame which defines the personality of the assembly, on top of which sits a work top with a laminate finish.

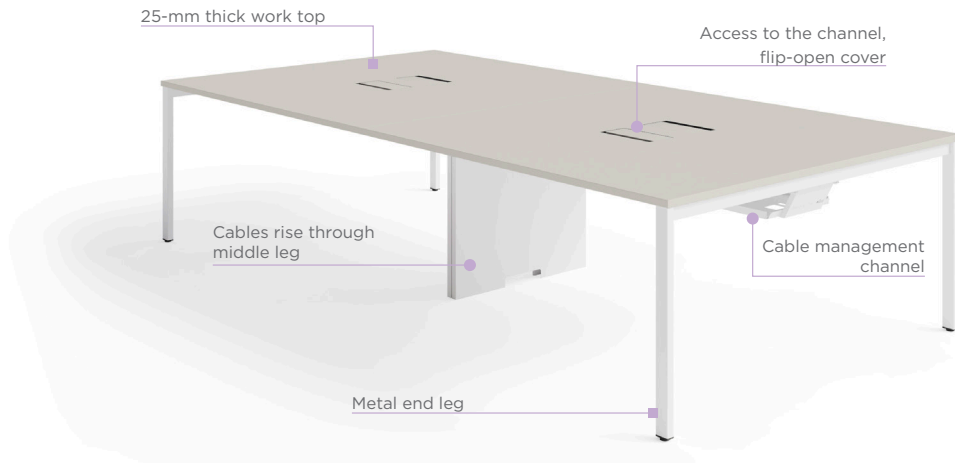

OPTIONAL FEATURES


MODESTY PANEL

- 0.8-mm thick steel
- 16-mm thick melamine

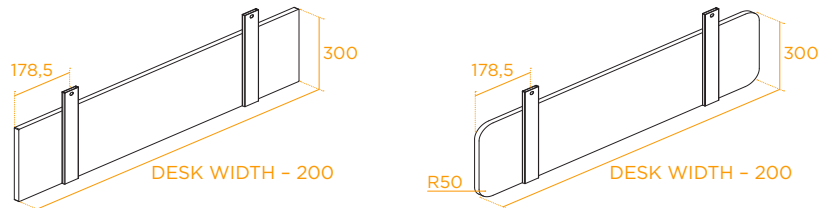

TYPE B MODESTY PANEL

- 0.8-mm thick steel




TECHNICAL SHEET



OPTIONAL FEATURES

TRAY


- 0.8-mm thick metal
- For flip-open cover or cable grommet.
- As individual desk or return.




ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.

CABLE MANAGEMENT CHANNEL

- Single, hinged

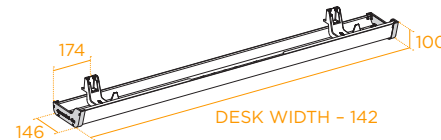


- Single, fixed



ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.

- Double with 2 height positions

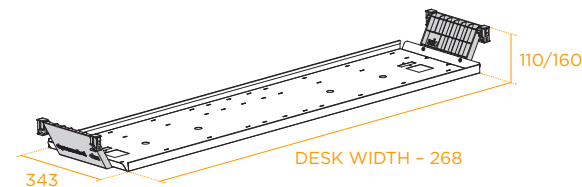

ABS side covers in white (BA) with white (BA) structure.
In black (NE) for other structure colours.



**CLIC
DESK**




OPTIONAL FEATURES


CHANNEL ACCESSES

Channel access in white (BA) or black (NE) as per work top* or order**


- Polyamide flip-open cover *
White (BA) and black (NE)



- Ø80 cable grommet *
White (BA) and black (NE)



- Metal flip-open cover **
2-mm perimeter in black (NE)
Built-in sockets option




- Ø80 multi-connection socket **
White (BA) and black (NE)
1 power socket + 1 USB C
+ 20 cm cable ending in
Wieland connector



* White (BA) access: White (BA) work top • Black (NE) access: Other work tops ** As per order


POSITIONING:

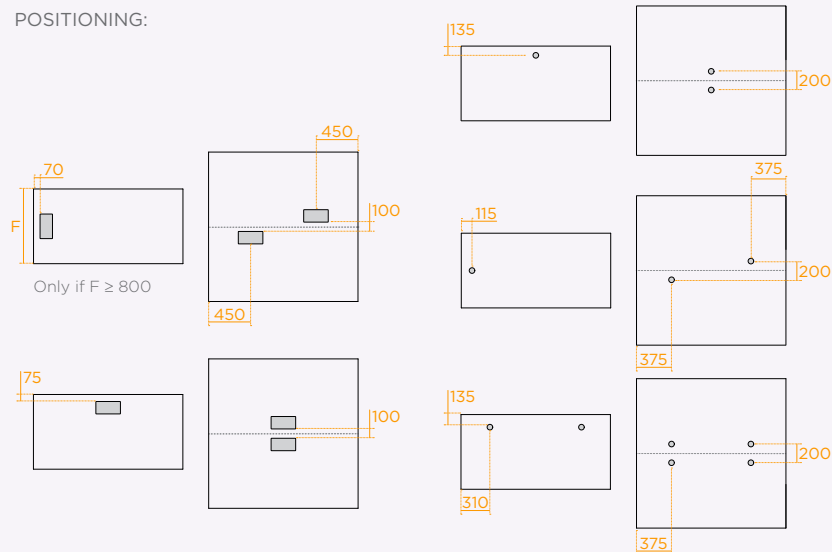

OPTIONAL FEATURES

CABLE RISER


- Magnetically attached to leg



- Jointed to channel




- Mesh to channel




INDIVIDUAL WORK STATION

- Totem to floor




- Access cover on middle leg

Individual



Bench



1-mm thick painted sheet metal

GROUP WORK STATION



CLIC DESK



DESCRIPTION

WORK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.

Single work top on face-to-face work stations.

The return can be fitted on either the right or left of the main desk.

STRUCTURE

Metal frame built with 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.


Metal end legs built with 1.5-mm thick 50x30 vertical profiles and 2-mm thick 50x40 upper crossbar profiles as per UNE-EN 10305.

Metal middle leg on the group work stations built with 1.5-mm thick 50x30 vertical profile and two 1.5-mm thick 50x30 profiles as per UNE-EN 10305 welded to the leg.



60/80µm epoxy powder in compliance with current reaction to fire standard UNE 23827-90.

Leg levelling: 20 mm


Bench



Individual desk

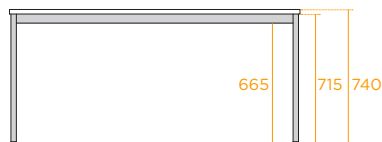

Bench middle leg




Individual middle leg



TECHNICAL SHEET



DETAILS



▲ FLIP-OPEN COVER
Metal



▲ FLIP-OPEN COVER
Polyamide



▲ CHANNEL ACCESS
Ø80 multi-connection
socket



▲ CHANNEL
Double



▲ CHANNEL
Single, fixed



▲ CHANNEL
Single, hinged



▲ MIDDLE LEG



▲ MIDDLE LEG
With access cover



CERTIFICATES

tecnaliacertified
PRODUCTOS CERTIFICADOS DE MOBILIARIO
RT.01 MOBILIARIO - MCF34
UNE-EN 527



RECYCLABILITY RATE






CLIC
DESK

TECHNICAL SHEET




RANGE

INDIVIDUAL DESK




W \ F	80	100	120	140	160	180	200
60	●	●	●	●	●	●	●
70	●	●	●	●	●	●	●
80	●	●	●	●	●	●	●
100		●	●	●	●	●	●

DESK IN ROWS

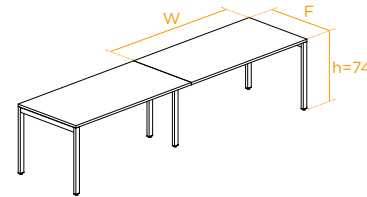


W \ F	80	100	120	140	160	180	200
60	●	●	●	●	●	●	●
70	●	●	●	●	●	●	●
80	●	●	●	●	●	●	●

RETURN



W \ F	80	100	120
60	●	●	●

BENCH

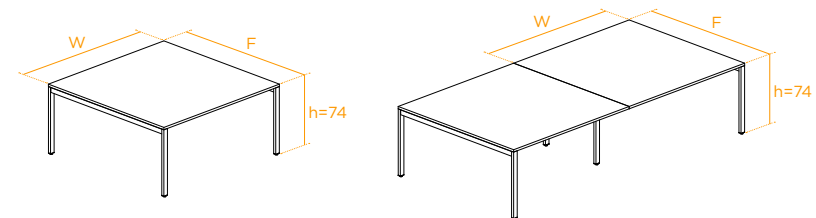

W \ F	120	140	160	180	200
120	●	●	●	●	●
140	●	●	●	●	●
160	●	●	●	●	●

KEY

PRICE TERMS

- GENERAL
- EXPRESS

