



CONIC MANAGEMENT DESKS


Its angled leg is the hallmark of the Conic desk. Through their lightweight design, the legs accompany the organic shapes of the work top to give a homogeneous visual aesthetic to the entire assembly. The high quality with which the joints are solved make this programme a first-class solution for the work environment.



OPTIONAL FEATURES


MODESTY PANEL

- ▶ 0.8-mm thick steel
- ▶ 16-mm thick melamine

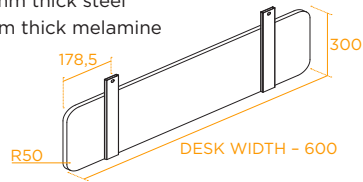

TRAY


- ▶ 0.8-mm thick metal
- With flip-open cover or cable grommet.



ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.

CABLE MANAGEMENT CHANNEL

- ▶ Single, hinged

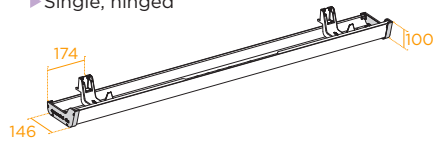

ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.


TECHNICAL SHEET



OPTIONAL FEATURES

CHANNEL ACCESSES


- ▶ Polyamide flip-open cover
- White (BA) and black (NE)



- ▶ Ø80 cable grommet *
- White (BA) and black (NE)



- ▶ Melamine flip-open cover
- 2-mm perimeter in black (NE)
- Same finish as work top
- Built-in sockets option





- ▶ Ø80 multi-connection socket **
- White (BA) and black (NE)
- 1 power socket + 1USB A + 1USB C
- + 20 cm cable ending in Wieland connector



* White (BA) access: White (BA) work top • Black (NE) access: Other work tops ** Según pedido

Positioning:



CABLE RISER

- ▶ Jointed to channel



- ▶ Mesh to channel





CONIC MANAGEMENT DESKS



DESCRIPTION

WORK

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

- ▶ Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished on top with 0.7-mm thick anti-fingerprint HPL as per the indications of UNE 53173-92 and underneath with balancing sheet (BM80). 2-mm thick ABS edge as per UNE 56.843:01.
- ▶ Finished in wood treated with high-resistance varnish. 2-mm thick wood edge.


STRUCTURE

Metal frame built with two 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.

End legs built with 1.5-mm thick 50x30 upper crossbars as per UNE-EN 10305. The legs to the floor are d-50 cylindrical tubes which taper to d-25 mm.

60/80 µm epoxy powder in compliance with current reaction to fire standard UNE 23827-90.


Leg levelling: 20 mm

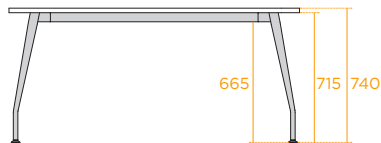

TECHNICAL SHEET



DETAILS



▲ FLIP-OPEN COVER
Metal



▲ FLIP-OPEN COVER
Polyamide



▲ CHANNEL ACCESS
Ø80 multi-connection socket



▲ CHANNEL
Single, hinged



CERTIFICATES

tecnaliacertified
PRODUCTOS CERTIFICADOS DE MOBILIARIO
RT 01 MOBILIARIO - MGF34
UNE-EN 527




CONIC MANAGEMENT DESKS

TECHNICAL SHEET




RANGE

INDIVIDUAL DESK



W \ F	100	120	140	160	180	200
60	●	●	●	●	●	●
80	●	●	●	●	●	●
100	●	●	●	●	●	●

RETURN




W \ F	80	100	120
60	●	●	●

KEY

PRICE TERMS


● GENERAL

TRAPEZOIDAL TABLE




W \ F	120	140	160	180	200	220	240
120	●	●	●	●	●	●	●
140		●	●	●	●	●	●
160			●	●	●	●	●

BARREL TABLE



W \ F	180	200	220	240
120	●	●	●	●
140	●	●	●	●
160	●	●	●	●

ELLIPTICAL TABLE

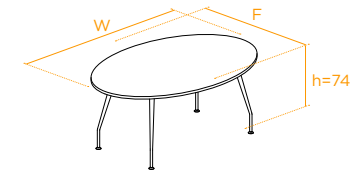

W \ F	180	200	220	240
120	●	●	●	●
140	●	●	●	●
160	●	●	●	●