




KENA WORK CHAIR

FEATURES

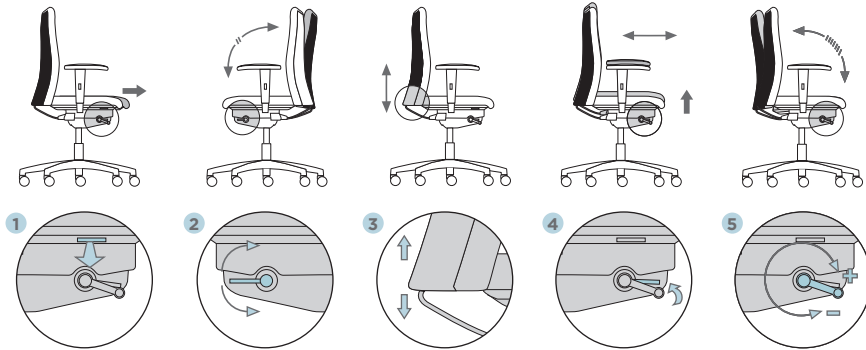


TECHNICAL SHEETS


OPTIONS

Armrest

- Height adjustable (1D 2D: 80 mm, 5 positions)
- Rotation arm support (2D: 3 positions -15°, 0°, +15°)
- Width adjustable in assembling (50 mm, 25 each side)

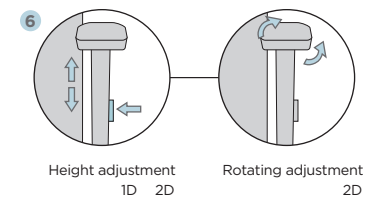

DIMENSIONS

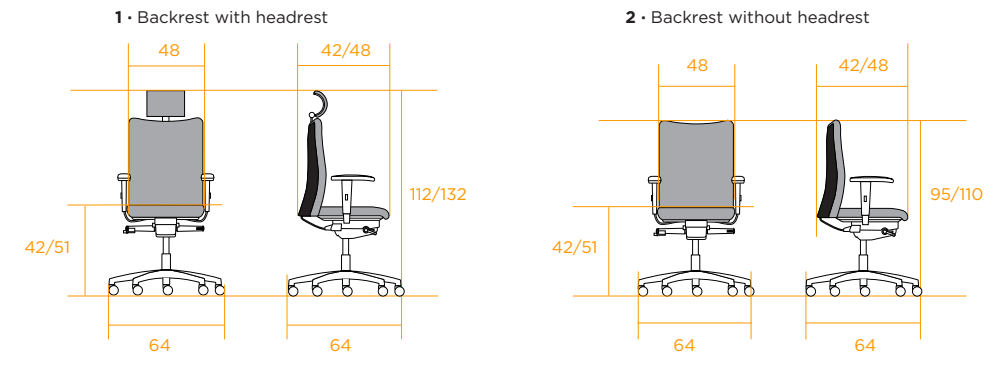

		· 1 ·	· 2 ·
kg	Weight in Kg.	18,8	17,6
d	Dimensions	70x70x120	70x70x110
Ta	Seat fabric	0,45	0,45
Tr	Backrest fabric	0,40	0,25
Pa	Seat leather	0,93	0,93
Pr	Backrest leather	0,93	0,93



KENA WORK CHAIR

TECHNICAL SHEETS



DESCRIPTION

BACKREST

Height adjustable 60 mm with 5 positions (zipper regulation). Reclining angle up to 21°.

Option headrest 50 mm height adjustable with 5 positions, and 36° rotation with 4 positions.

Backrest of polypropylene with a rubber foam cushion with a 35 mm thickness and a density of 35 Kg/m³ onto which the fabric is fitted

SEAT

Adjustable in depth 60 mm with 5 positions with a return spring to its original position.

Injection polypropylene support with ergonomically shaped flexible rubber foam with a 50 mm thickness and a density of 42 kg/m³, onto which the fabric is fitted.

MECHANISM

Spring-action synchro mechanism.

It can be locked in 4 position or permanent contact with non-return system. Pressure set by a lever to customise the pressure of the backrest.

BASE

Polyamide with fiber: Ø680 mm, black finish.

Aluminum: Ø700 mm, polished or painted epoxy polyester.

Soft and hard floor castors ø 60, black color.

Option conductive castor ø 60.



AMREST

In aluminium with a polyamide cover. Arm support in texturized polypropylene, soft touch.



▲ KENA AMREST



RECYCLABILITY RATE



CERTIFICATIONS AND STANDARDS

