



VIRA MANAGEMENT DESKS


With its slanted wooden or metal legs as its hallmark and harmonious finishes, the friendly shapes of this work desk-cum-table follow the aesthetic of the current market.



OPTIONAL FEATURES


MODESTY

- 0.8-mm thick metal
- 16-mm thick melamine

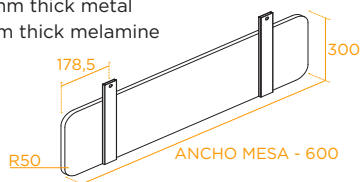

CABLE MANAGEMENT CHANNEL


- Single, hinged

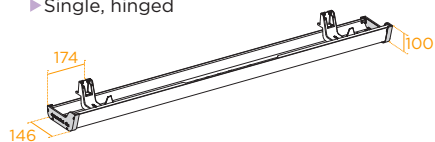

ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.

TRAY

- 0.8-mm thick steel
- For flip-open cover or cable grommet




ABS side covers in white (BA) with white (BA) structure. In black (NE) for other structure colours.




OPTIONAL FEATURES

CHANNEL ACCESSES

- Polyamide flip-open cover *
White (BA) and black (NE)



- Metal flip-open cover **
2-mm perimeter in black (NE)
Built-in sockets option



- Ø 80 cable grommet *
Colour: white (BA) and black (NE)





- Ø 80 multi-connection socket **
Color BA y NE
1F + 1USB A + 1 m cable ending
in Wieland connector



* White (BA) access: White (BA) work top • Black (NE) access: Other work tops


** As per order

Positioning:



CABLE RISER

- Magnetically attached to leg



- Jointed to channel



- Mesh to channel





VIRA MANAGEMENT DESKS



DESCRIPTION

WORK TOP

Top made of 25-mm thick chipboard bonded with synthetic resins, especially designed for applications that require high bending strength. Average density: 620/595 kg/m³ as per EN 323.

► Laminate finish. 2-mm thick ABS edge as per UNE 56.843:01.

► Acabado en estratificado de alta densidad (HPL) antihuellas, en la cara superior e-0,7 mm según lo indicado en la norma UNE 53173-92 y un contratiro (BM80) en la inferior. El canto de ABS de 2 mm de espesor según norma UNE 56.843:01.

► Acabado en madera con tratamiento de barnizado en alta resistencia. Canteado en madera de 2 mm de espesor.


STRUCTURE

Metal frame built with two 1.5-mm thick 50x30 steel profiles as per UNE-EN 10305.

End legs built with 1.5-mm thick 50x30 upper crossbars as per UNE-EN 10305 and legs to the floor. Option: 1.5-mm thick shaped sheet metal or in oak veneered beech wood.

60/80µm epoxy powder in compliance with current reaction to fire standard UNE 23827-90.

Leg levelling: 20 mm

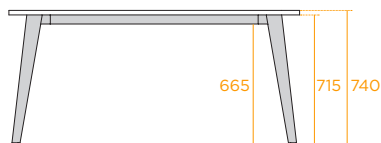

TECHNICAL SHEET



DETAILS



▲ FLIP-OPEN COVER
Metal



▲ FLIP-OPEN COVER
Polyamide



▲ CHANNEL ACCESS
Ø 80 multi-connection
socket



▲ CHANNEL
Single, hinged



CERTIFICATES

tecnaliacertified
PRODUCTOS CERTIFICADOS DE MOBILIARIO
RT.01 MOBILIARIO - MCF34
UNE-EN 527




VIRA MANAGEMENT DESKS

TECHNICAL SHEET




RANGE

INDIVIDUAL DESK



	W \ F	100	120	140	160	180	200
60		●	●	●	●	●	●
80		●	●	●	●	●	●
100		●	●	●	●	●	●

RETURN




	W \ F	80	100	120
60		●	●	●

KEY

PRICE TERMS


● GENERAL

TRAPEZOIDAL TABLE




	W \ F	120	140	160	180	200	220	240
120		●	●	●	●	●	●	●
140			●	●	●	●	●	●
160				●	●	●	●	●

BARREL TABLE



	W \ F	180	200	220	240
120		●	●	●	●
140		●	●	●	●
160		●	●	●	●

ELLIPTICAL TABLE



	W \ F	180	200	220	240
120		●	●	●	●
140		●	●	●	●
160		●	●	●	●